

## MPC60 - Permanent Split Capacitor (PSC) Gearmotor

### Construction Features:



- Class B insulation
- Aluminum construction for strength and heat dissipation
- Ball bearings used for the motor and gearbox
- Reliable, low noise and long life
- Permanently grease lubricated gearbox
- Reversible
- Continuous duty

### Applications:

- Office equipment
- Conveyor drive
- Valve actuators
- Food machinery
- Medical equipment
- Industrial machinery

### Options:

- Output Shaft
- Leads
- Voltage/frequency
- Gearbox lubrication
- Motor shaft extension

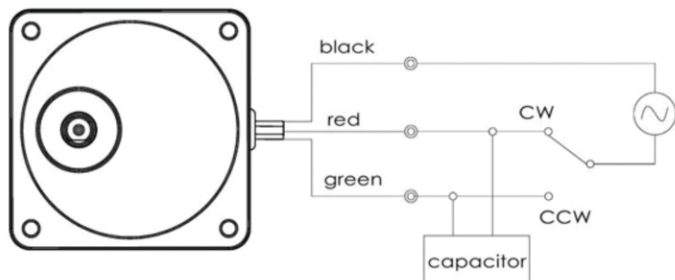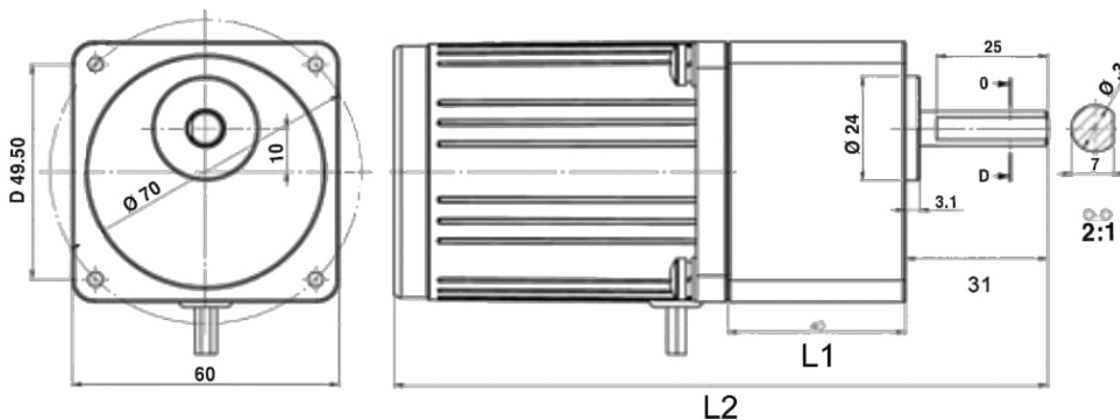

Power: 10 Watt

Motor Speed: 1680 RPM

Ratio		3	5	9	12.5	15	20	23	30	40	50	60	70	90	100	120	150	180
Rated Speed	RPM	560	336	187	134	112	84	73.1	56	42	33.6	28	24	18.7	16.8	14	11.2	9.4
Rated Torque	in-lbs	1.6	2.6	4.7	6.5	7.8	10.4	12	15.6	20.7	25.9	31.1	36.3	46.6	51.9	62.2	77.7	93
Geadhead (L1)	mm	32												40				
Gearmotor (L2)	mm	139												147				